ACRO ALUMINUM INC.

2000 SERIES

2” CURTAINWALL

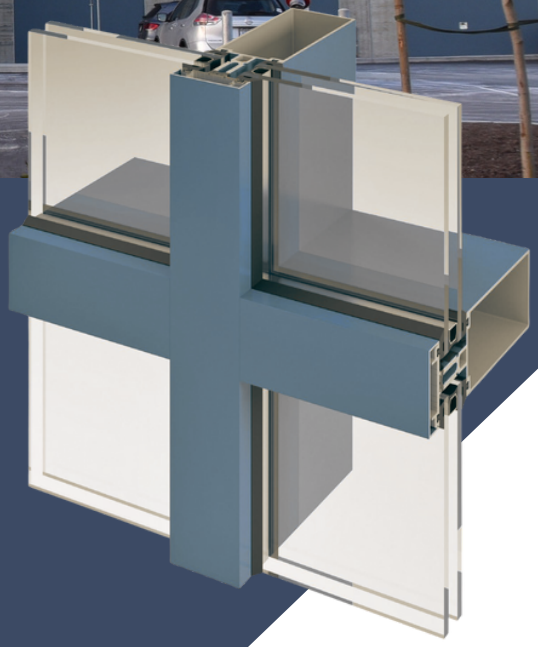

FEATURES

- *2” frame width*
- *4” backsection (6”overall depth)*
- *Outside glazed captured curtainwall*
- *1” infill (dual glazed)*
- *Concealed shear block joinery*
- *Continuous gasket thermal break*
- *Designed to integrate with door and vent systems*
- *Aluminum Alloy 6063 T5 temper*
- *Pressure-equalized rainscreen system*
- *Injection molded corner block to control water infiltration*
- *Steel reinforced mullions available*
- *Extended cap/sunshade available*

2000 SERIES: THERMAL MODELLING RESULTS

Dual Glazed Low-e Coating	Center of Glass U-Factor (W/m2·K)	Overall U-Factor (W/m2·K)	Overall U-Factor (Btu/h·ft2·°F)	SHGC	VT
Solarban60 Low-e	1.39	2.25	0.40	0.37	0.64
Solarban60 on EnergyAdvantage Low-e surface 4	1.13	2.02	0.36	0.35	0.60