

ACRO

ALUMINUM INC.

8000 SERIES THERMAL VENT WINDOW - TOP HUNG PROJECT OUT



Series 8000 VENT MANUAL

Table of Contents

Features, Finishes and Sizes.....	3
Test Results.....	4
Storefront Installation Drawings.....	5
Curtainwall Installation Drawings.....	6
Hardware Options.....	7

FEATURES:

- Polyurethane pour and debridge thermal break
- Overlap vent construction
- Rigid corner key joinery
- Subframe - Equal leg for storefront or unequal leg for curtainwall
- 1" glazing infill
- Extruded screen frames
- Variety of locking, operating, and hinging hardware
- Structural, air, and water tested
- Shop or field glazed

AVAILABLE FINISHES:

- Clear anodized finish (Class I)
- Black/bronze anodized finish (Class I)
- Custom color powder or wet paint

SIZE MAXIMUM AND MINIMUMS:

- Maximum size: 60" x 48"
- Minimum size: 17" x 17"

TEST SUMMARY - AIR, WATER, STRUCTURAL


Testing was performed following the methods and requirements outlined in the following standards:

- ASTM E283-19 - *Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen*, 2019.
 - ASTM E331-00(2016) - *Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference*, 2000.
 - ASTM E330/E330-14 *Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Air Pressure Difference (ASTM E330)*.
- Maximum air leakage recorded at ± 75 Pa ($\sim \pm 1.57$ psf) = 0.133 L/s/m² (0.026 cfm/ft²).
 - Maximum pressure differential achieved without water penetration 720 Pa (~ 15.04 psf).
 - Maximum pressure differential achieved during structural performance testing without breakage 3360 Pa (~ 70.18 psf).


TABLE 1 - THERMAL MODELING RESULTS

Product Name	Glazing Detail	Center of Glass U-Factor (Glazing only) (W/m ² K)	Overall Glass U-Factor (W/m ² K)	Overall Glass U-Factor (Btu/hft ² F)	SHGC	VT
Acro 8000 Single Awning	6 mm Cardinal 272 Low-E Surface #2 1/2" Butyl Rubber x Quanex T-spacer Argon 90% / Air 10% 6 mm Clear	1.406	2.491	0.439	0.275	0.450
Acro 8000 Single Awning	6 mm Cardinal 270 Low-E Surface #2 1/2" Butyl Rubber x Quanex T-spacer Argon 90% / Air 10% 6 mm Clear	1.390	2.477	0.436	0.248	0.435
Acro 8000 Single Awning	6 mm Cardinal 272 Low-E Surface #2 1/2" Butyl Rubber x Quanex T-spacer Argon 90% / Air 10% 6 mm i89 Surface #4	1.136	2.320	0.409	0.270	0.440

ACRO ALUMINUM WINDOWS 8000 VENT 2" SERIES

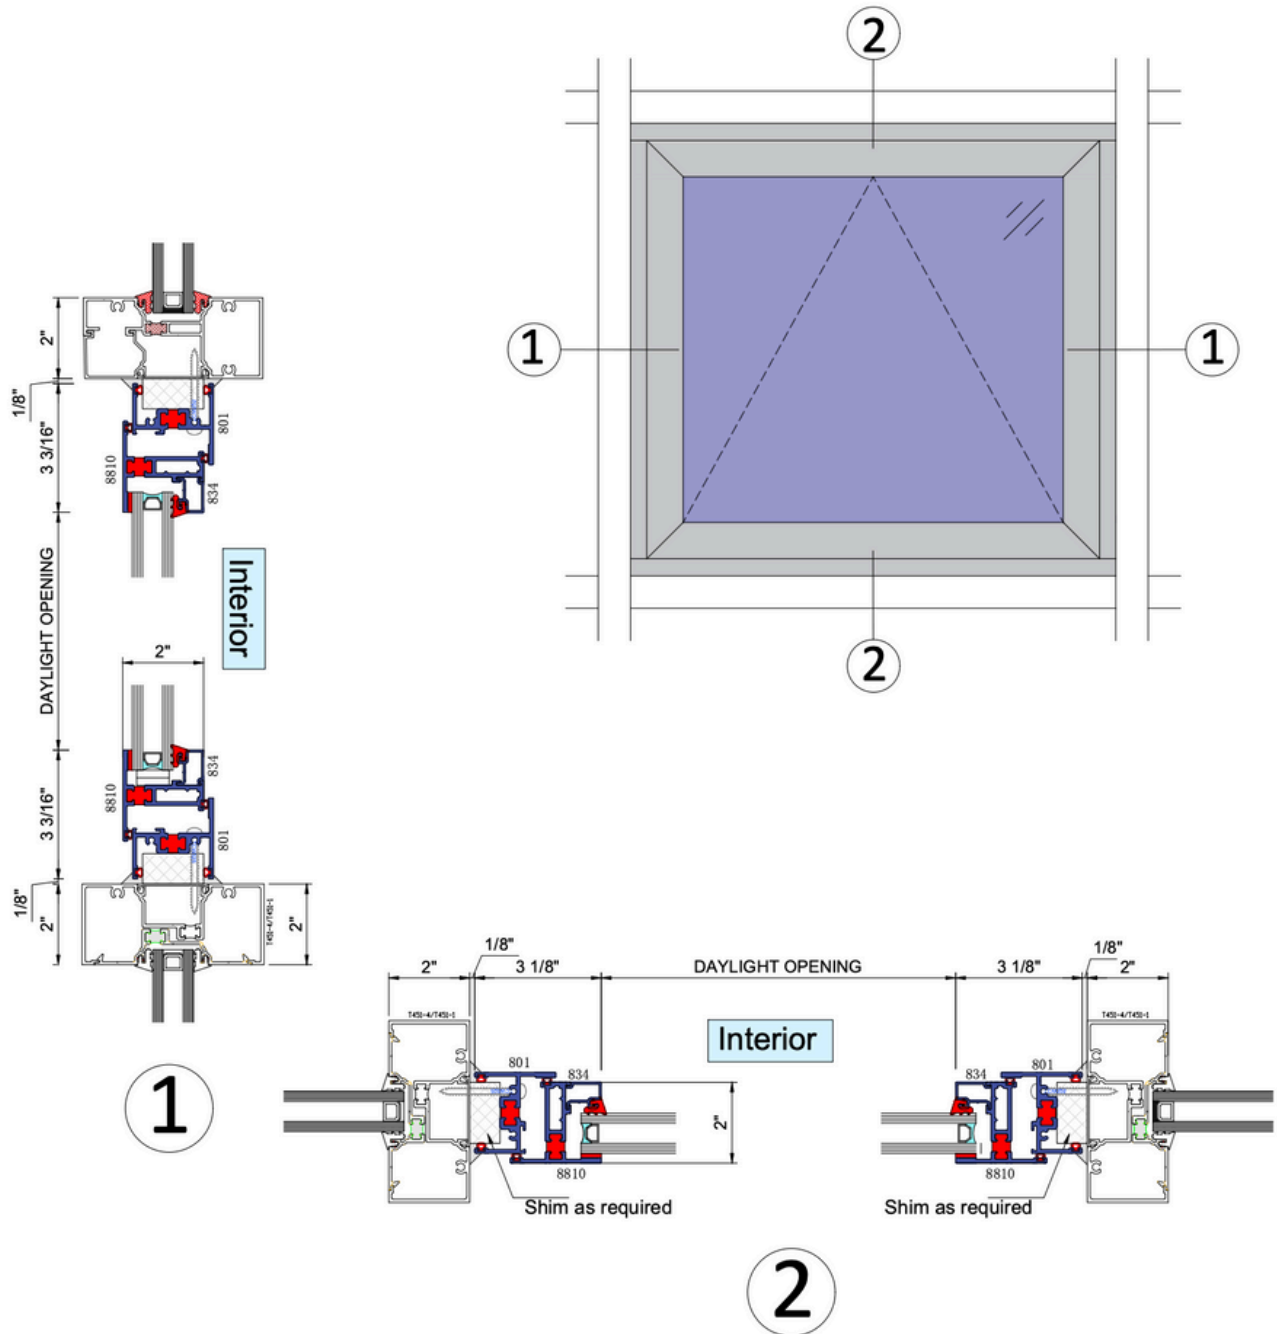

ACRO ALUMINUM WINDOWS 8000 VENT 2" SERIES

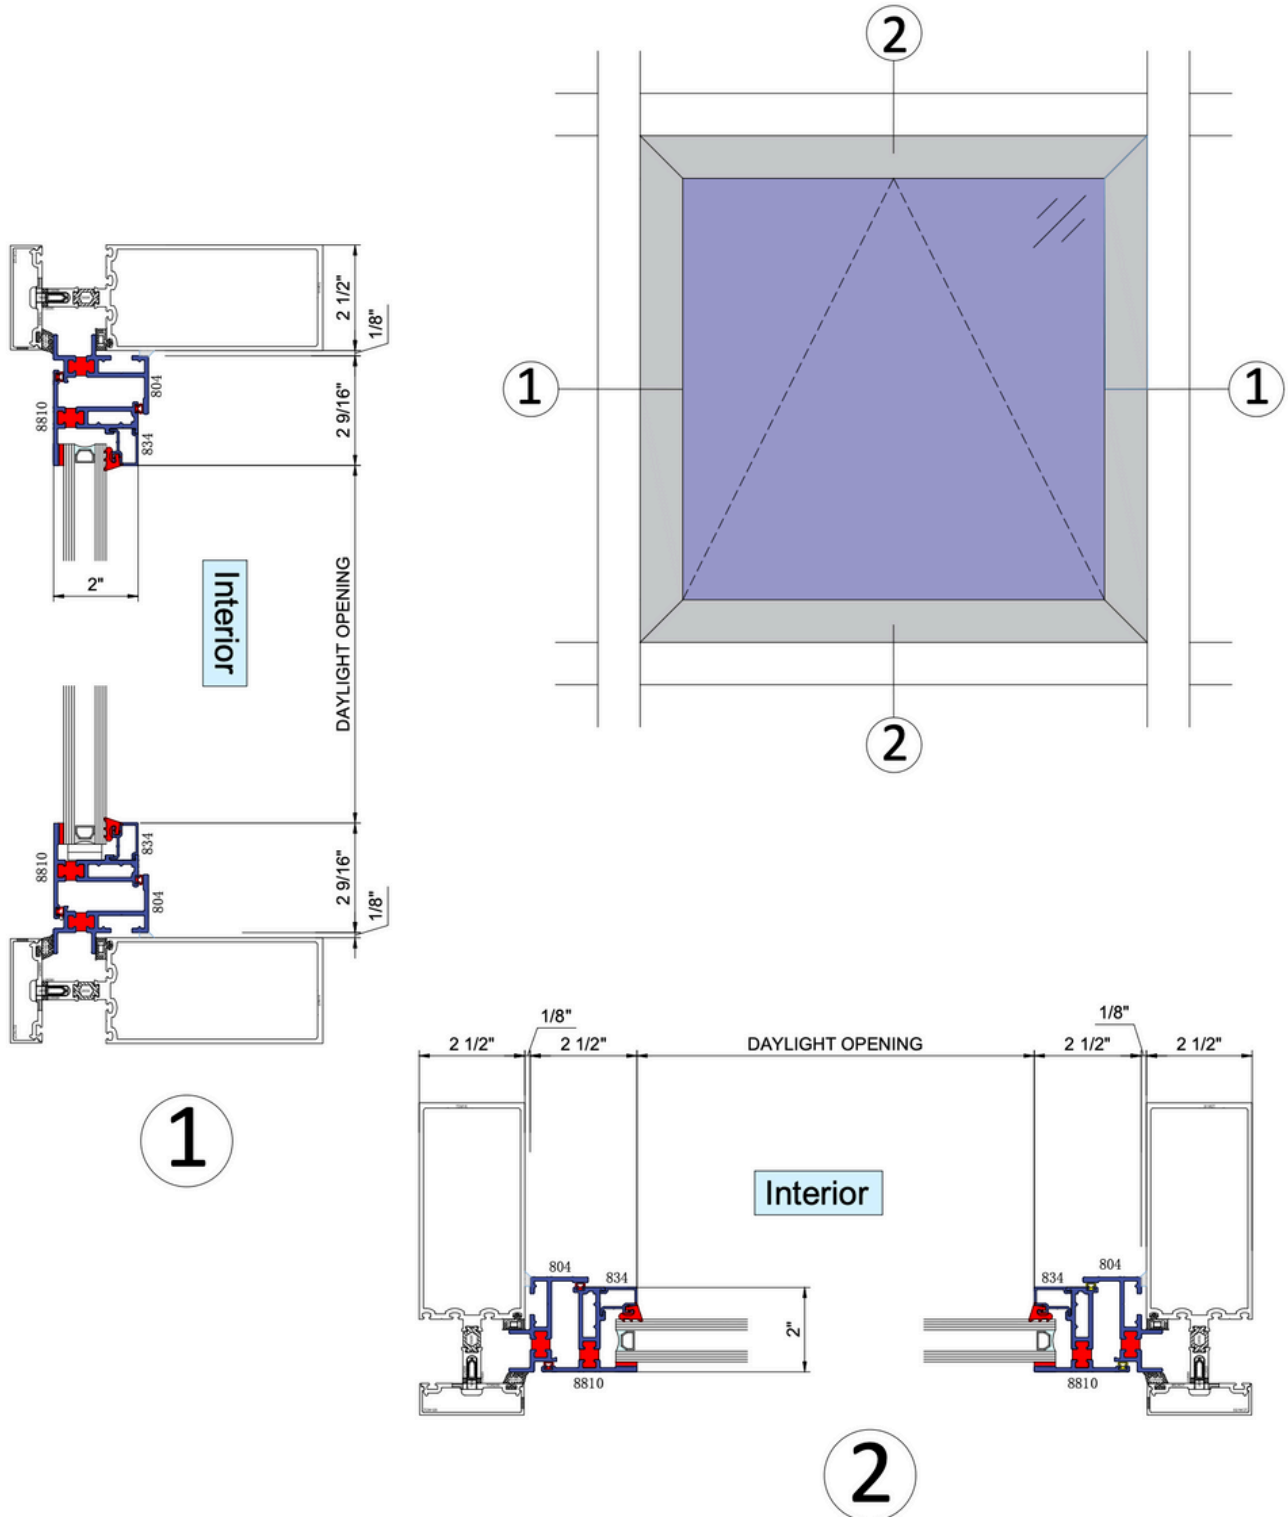

HARDWARE OPTIONS

STANDARD HARDWARE:

- 4 Bar Stainless Steel Hinges with limit stop
- Cam Handle Locks

OPTIONAL HARDWARE:

- Roto Style Crank Operator
- WOCD Device
- Pole and Pole Ring
- Insect screens with wickets to access cam handles

Open in and Casement configurations are available as well.

